

A Simple Transverse Motion Detector for Railguns

S. J. Levinson and Stephan Bless

Institute for Advanced Technology
The University of Texas at Austin

January 2004

IAT.R 0326

Approved for public release; distribution unlimited.

20040210 092

*Institute for Advanced Technology
The University of Texas at Austin*



The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.

A SIMPLE TRANSVERSE MOTION DETECTOR FOR RAILGUNS

Scott J. Levinson and Stephan Bless

Institute for Advanced Technology, Austin, Texas

This paper addresses the accurate measurement of the transverse armature-sabot motion during a railgun shot. One way to make such measurements is to use three orthogonally arranged piezoresistive accelerometers made by ENDEVCO. Model 7270A-200k is a tiny unit rated for measurements up to 200 kGee. Each unit costs about \$1,500 and has a specified 4-kGee uncertainty due to "non-linearity and hysteresis" and a 5 percent "transverse sensitivity." There are "Zero shifts"—an output voltage corresponding to 0 acceleration, and the unit can be highly susceptible to electromagnetic interference (EMI). Assuming a railgun-launched armature experiences a 10 percent transverse/longitudinal acceleration ratio, a 100-kGee axial launch will result in a transverse measurement uncertainty on the same order of magnitude as the measurement itself. Expense and measurement uncertainty are the principal liabilities of the piezoresistive-accelerometer method for measuring transverse acceleration. The new method, below, addresses these liabilities.

A diagram of the new technique is shown in Figure 1. The idea is to *accurately* determine the independent transverse separations x_1 and x_2 (and related velocities dx_1/dt and dx_2/dt , and accelerations d^2x_1/dt^2 and d^2x_2/dt^2) by accurately measuring changing capacitances C_1, C_2 . Dynamic analyses of the sabot material and geometry (e.g., using DYNA) can also be used to obtain a relatively accurate relationship between applied force and acceleration with separations x_i .

Four parallel-plate capacitors shown in the figure are each formed by using one rail for one of the plates and a small copper sheet on the sabot as the other. The two capacitors on the left side of the sabot are in series to form C_1 . The inductor L_1 and capacitor C_1 comprise a high-Q tank circuit to tune oscillator circuit 1. A similar circumstance applies to C_2 and L_2 on the right. The two oscillation signals, having squared radian frequencies $\omega_1^2 = (C_1 L_1)^{-1}$ and $\omega_2^2 = (C_2 L_2)^{-1}$, are summed, delivered to an antenna, and allowed to propagate through the laminated containment. These signals may be received concurrently by fixed RF receivers and recorded by a LeCroy oscilloscope.

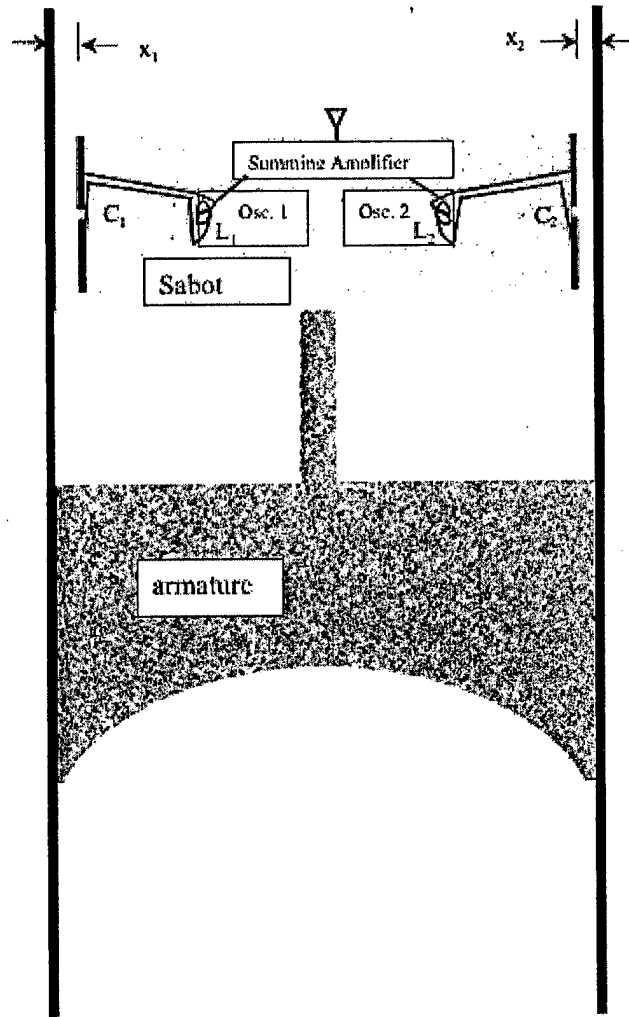


Figure 1. A diagram of the new technique.

The relationship of C_i with separation x_i (to first order) is $C_i = 0.5\epsilon A/x_i$, where ϵ is the permittivity of air (8.85 pF/m), A is the cross-sectional area of the capacitor plate on the sabot, and x_i is the transverse plate separation—the desired measurement quantity. Nominal values are: $x_i = 1$ mm, $A = 35$ mm*35 mm $\Rightarrow C_i = 5$ pF. Small inductors (e.g., 10 turn coil radius = 3 mm, ~ 1 μ H) can be oriented to minimize voltages induced by the low-frequency railgun B-field. Different constant inductor values (e.g., $L_1 = 1$ μ H, $L_2 = 0.5$ μ H) result in different nominal signal frequencies for osc_1 (71 MHz) and osc_2 (100 MHz).

A simple, time-varying relationship between transverse sabot motion and frequency may be obtained by combining the two equations for C_i above to give:

$$x_i(t) = 0.5L\epsilon A\omega_i^2(t).$$

Careful static measurements will provide a more accurate relationship between C_i and x_i (and between x_i and ω_i^2), but $x_i(t)$ remains directly proportional to $\omega_i^2(t)$. Since digital measurements on a LeCroy oscilloscope are resolved in time or frequency to within 10 ppm (i.e., $\Delta\omega/\omega < 10^{-5}$), the associated transverse position measurement uncertainties $\Delta x_i/x_i = \Delta\omega^2/\omega^2 < 10^{-10}$ would be minimal.

Even after mixing down the received signals (for example, to 1 MHz), the extraordinarily large number of time samples of x_i can be used to minimize errors associated with time derivatives of $x_i(t)$ for velocity and acceleration calculations.

ACKNOWLEDGEMENT

The research reported in this document was performed in connection with Contract number DAAD17-01-D-0001 with the U.S. Army Research Laboratory. The views and conclusions contained in this document are those of the authors and should not be interpreted as presenting the official policies or position, either expressed or implied, of the U.S. Army Research Laboratory or the U.S. Government unless so designated by other authorized documents. Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof. The U.S. Government is authorized to reproduce and distribute reprints for Government purposes notwithstanding any copyright notation hereon.